
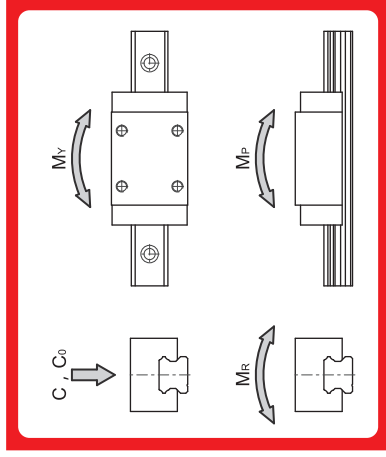
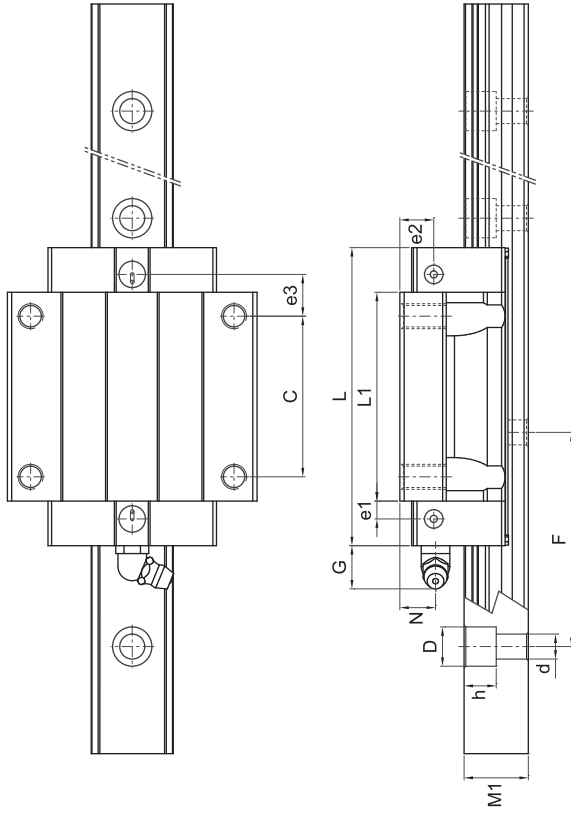


型号	螺栓规格		下孔径
	S1	S2	H
LMG15	M5	M4	4.4
LMG20	M6	M5	5.3
LMG25	M8	M6	6.9
LMG30	M10	M8	8.6
LMG35	M10	M8	8.6
LMG45	M12	M10	10.4

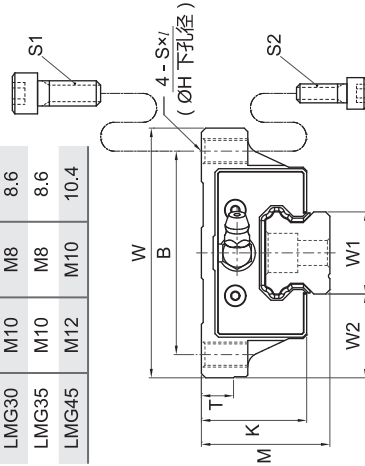

单位 (mm)

型号	组合尺寸			滑块尺寸								导轨尺寸				基本额定载荷				额定静力矩				质量			
	高度 M	幅宽 W	长度 L	B	C	安装孔 S×I	L1	T	K	N	e1	e2	e3	G	油嘴 规格	幅宽		高度	孔距	安装螺栓孔 D×H×D	C	C0	M _P (KN·m) 单个 滑块	M _V (KN·m) 两个滑块 紧密接触	M _R KN·m	滑块 Kg	导轨 Kg/m
																W1	W2										
LMG15 C	24	47	58.2	38	30	M5×8	39.5	5.5	19.5	5	3.3	4	8.6	7	M4×0.7	15	16	13	60	7.5×5.3×4.5*	11.8	18.9	0.13	0.76	0.15	0.19	1.29
LMG20 C	30	63	75	53	40	M6×10	52.5	7	25.4	8.5	4.5	7	10.8	12	M6×0.75	20	21.5	15	60	9.5×8.5×6	20	32	0.30	1.68	0.33	0.42	1.92
LMG20 LC	30	63	89.4	53	40	M6×10	66.9	7	25.4	8.5	4.5	7	18	12	M6×0.75	20	21.5	15	60	9.5×8.5×6	23.2	39.3	0.44	2.36	0.41	0.53	1.92
LMG25 C	36	70	83.6	57	45	M8×13	58.6	9	29.5	10	5	9.5	11.8	12	M6×0.75	23	23.5	18	60	11×9×7	27.9	42.5	0.44	2.47	0.51	0.62	2.67
LMG25 LC	36	70	102.6	57	45	M8×13	77.6	9	29.5	10	5	9.5	21.3	12	M6×0.75	23	23.5	18	60	11×9×7	34.2	56.6	0.76	3.99	0.67	0.81	2.67
LMG30 C	42	90	98	72	52	M10×15	69.8	10	34	8	5	8	14	12	M6×0.75	28	31	23	80	14×12×9*	38.8	57.8	0.70	3.88	0.83	1.10	4.48
LMG30 LC	42	90	120.2	72	52	M10×15	92	10	34	8	5	8	25.1	12	M6×0.75	28	31	23	80	14×12×9*	47.5	77.1	1.21	6.28	1.11	1.43	4.48
LMG35 C	48	100	111.2	82	62	M10×15	80.2	10	38.5	8	7.5	8	15.6	12	M6×0.75	34	33	26	80	14×12×9	51.7	75.5	1.04	5.72	1.31	1.50	6.24
LMG35 LC	48	100	136.6	82	62	M10×15	105.6	10	38.5	8	7.5	8	28.3	12	M6×0.75	34	33	26	80	14×12×9	63.2	100.7	1.81	9.29	1.75	1.94	6.24
LMG45 C	60	120	137.8	100	80	M12×18	102.2	12	49	10	8.5	10	17.6	13.5	PT 1/8	45	37.5	32	105	20×17×14	83.2	118.0	2.03	10.89	2.71	2.83	10.25
LMG45 LC	60	120	169.5	100	80	M12×18	133.9	12	49	10	8.5	10	33.5	13.5	PT 1/8	45	37.5	32	105	20×17×14	101.7	157.3	3.54	17.76	3.62	3.68	10.25

*1. LMG15 导轨标准的螺栓沉头孔 (7.5x5.3x4.5) 使用 M4 螺栓, 导轨型号为 LMG15R; 若需使用 M3 螺栓时, 沉头孔尺寸为 6x4.5x3.5, 导轨型号标示为 LMG15U.
2. LMG30 导轨标准的螺栓沉头孔 (14x12x9) 使用 M8 螺栓, 导轨型号为 LMG30R; 若需使用 M6 螺栓时, 沉头孔尺寸为 11x9x7, 导轨型号标示为 LMG30U.